




**KOTAKSUN – D1**

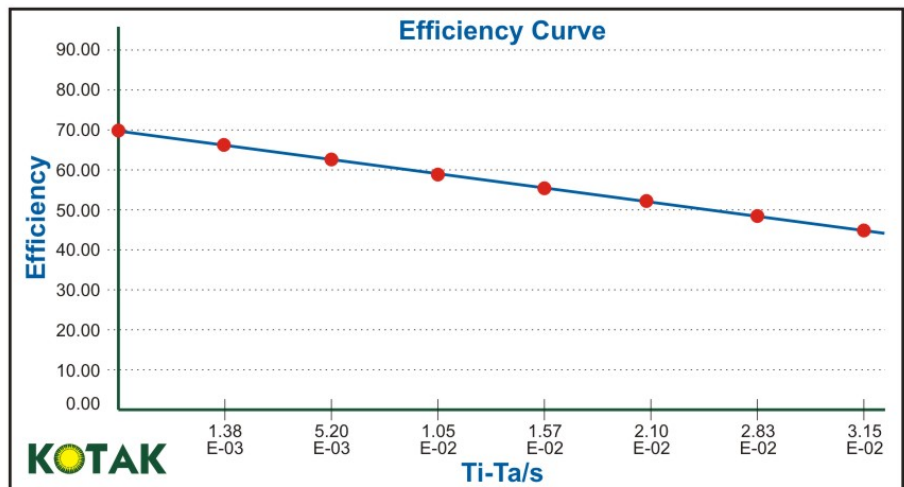

Thread type

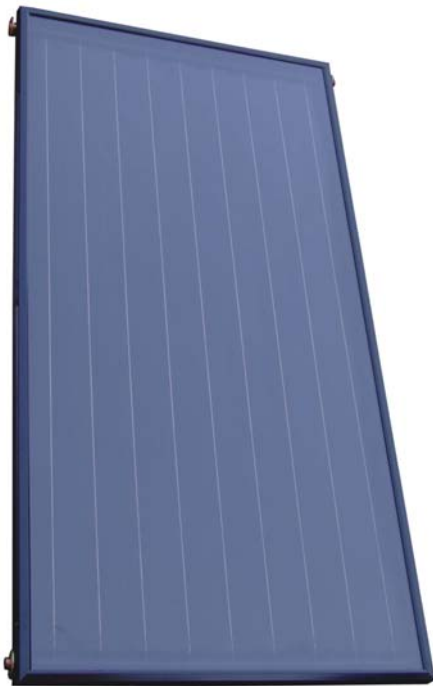





Various fittings



Standard connections



Packing

| DESCRIPTION                   | SPECIFICATION  |
|-------------------------------|--|
| Type Identification           | Flat plate, D1-4 Way ( 2 Inlet & 2 Outlet), D1S-3 Way ( 1 inlet & 2 outlet)  |
| Standards                     | BIS/IS 12933 Part II, DIN EN 12975-1:2006, EN 12975-2:2006   |
| External Dimension            | 2000(L) x 1000 (w) x 75 (H)  |
| Packing Dimension             | 2010(L) x 1080(w)x80(H)  |
| Riser tube                    | Copper   |
| Quantity                      | 8 Pcs  |
| Header Size                   | 25mm dia.  |
| Spectrum Absorber coating     | Black Coating, Absorptivity $\geq 0.94$ , emmissivity $\leq 0.12$  |
| Insulation material           | 50 mm thk fiberglass   |
| Frame                         | Aluminium alloy  |
| Tempered glass                | 4mm textured glass   |
| Back sheet                    | Aluminium back sheet   |
| weight                        | 35 kg  |
| Heat Transfer Fluid           | Potable water  |
| 10                            | 1.9 L  |
| Packing                       | Thermocole with Carton cover (for ends only)   |
| 40ft container/20ft container | 309 pcs/152pcs   |
| Certificate                   |     |