


KOTAKSUN – D3



Thread type

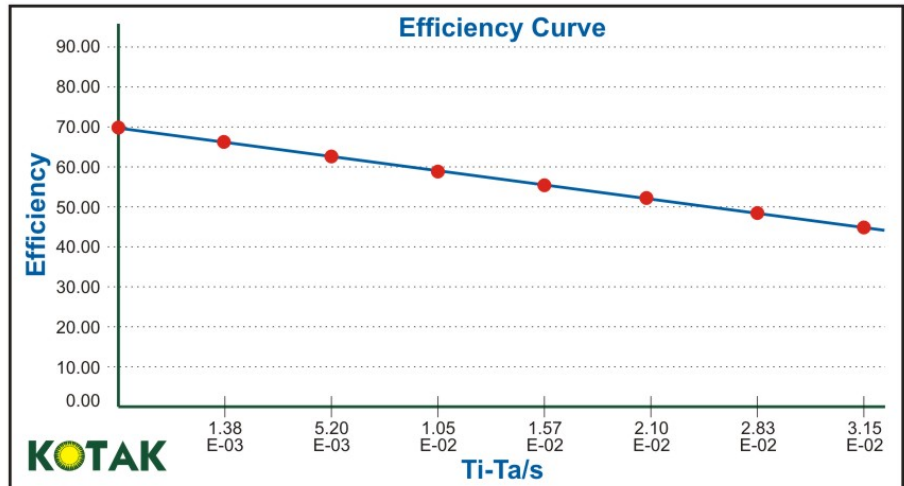

Various fittings



Standard connections



Packing

DESCRIPTION	SPECIFICATION
Type Identification	Flat pate, D3-4 Way (2 Inlet & 2 Outlet), D3S-3 Way (1 inlet & 2 outlet)
Standards	BIS/IS 12933 Part II, DIN EN 12975-1:2006, EN 12975-2:2006
External Dimension	2000(L) x 1000 (w) x 75 (H)
Packing Dimension	2010(L) x 1080(w)x80(H)
Riser tube	Copper
Quantity	9 Pcs
Header Size	25mm dia.
Spectrum Absorber coating	Black Coating, Absorptivity ≥ 0.94 , emmissivity ≤ 0.12
Insulation material	50 mm thk fiberglass
Frame	Aluminium alloy
Tempered glass	4mm textured glass
Back sheet	Steel back sheet
weight	35 kg
Heat Transfer Fluid	Potable water
Fluid volume	1.9 L
Packing	Thermocole with Carton cover (for ends only)
40ft container/20ft container	287 pcs/137pcs
Certificate	